


Flex™


OUR MOST STABLE
ENGINEERED PLATFORM

Flex 19

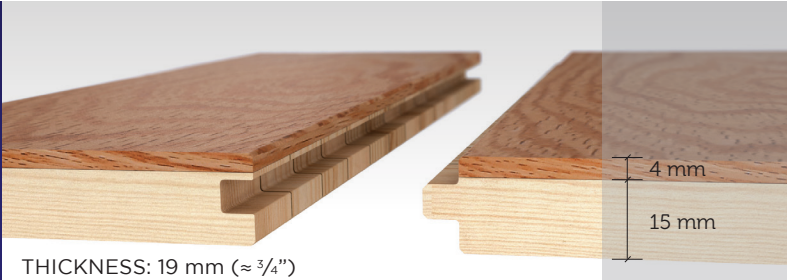

THICKNESS: 19 mm (≈ 3/4")

Flex 16

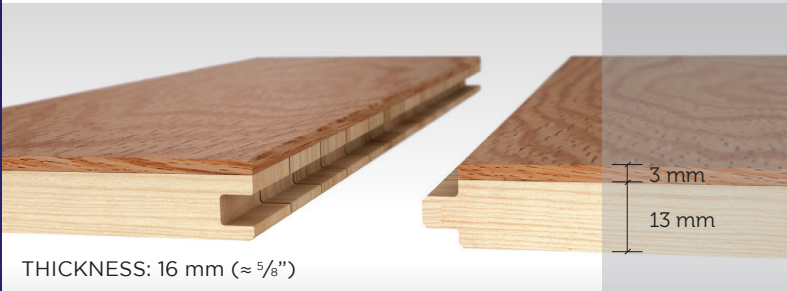

THICKNESS: 16 mm (≈ 5/8")

ENGINEERED FLOOR
COMPOSED OF A REAL SAWN
HARDWOOD TOP LAYER ON
A VERTICAL QUARTERSAWN
SOFTWOOD FILLETED CORE.

FEATURES & BENEFITS

Perfectly engineered product for new wood-frame constructions


Better structural qualities than traditional hardwood

Excellent acoustic performance


Superior stability

100% made with local resources

AVAILABLE SPECIES

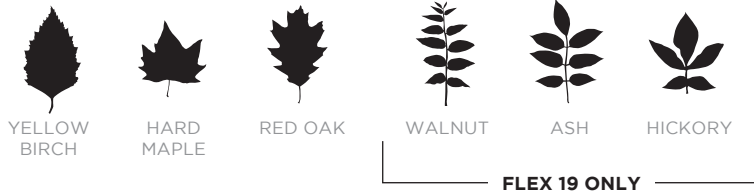

INSTALLATION AREAS

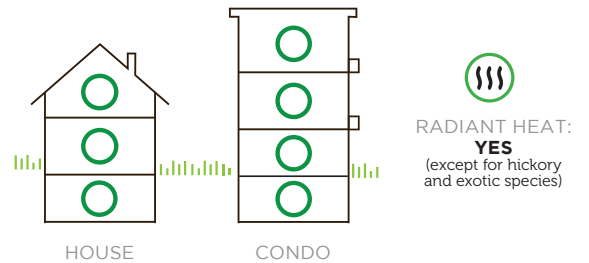

SUGGESTED UNDERLAYMENTS

Acoustitech VP is recommended (for a floating installation), PreVap (if stapled) or an equivalent accepted by the NWFA*.



* National Wood Flooring Association

SPECIFICATIONS

Flex 19

THICKNESS:  $\frac{3}{4}$ " (19 mm)

WIDTH: 4 $\frac{3}{8}$ " (111 mm)

LENGTH: Random lengths from 12" (35 cm) to 84" (2.13 m)

Flex 16

THICKNESS:  $\frac{5}{8}$ " (16 mm)

WIDTHS: 4 $\frac{3}{8}$ " (111 mm)

LENGTH: Random lengths from 12" (35 cm) to 84" (2.13 m)

AVAILABLE ACCESSORIES

- Maintenance Kit
- Touch-up pens
- Stain
- Stair nosing
- Reducer
- Threshold
- "T" molding
- Quarter round
- Subfloors

APPLICABLE STANDARDS

SURFACE BURNING (ASTM-E-84):

- FSI (Flame-Spread index) 95 to 155 Class C (depending on species)
- SD (Smoke Development) 95 to 400 (depending on species)

SURFACE BURNING (ULC-S-102-2):

- FSV (Flame-Spread value) 65 to 155 (depending on species)
- SDC (Smoke Development Classification) 270 to 485 (depending on species)

CRITICAL RADIANT FLUX (ASTM-E-648-94A):

0.42 to 0.65 W/cm² (depending on species)

FORMALDEHYDE EMISSION (ASTM-E-1333-02):

< 0.01 ppm

FORMALDEHYDE EMISSION (BS EN 120:1992):

1.5 mg/100 g (Class E1) (depending on species)

VOC TOTAL (ASTM-D-6670-01):

< 0.011 ppm (depending on species)

ACOUSTICAL (FIELD IMPACT INSULATION CLASS):

FIIC 66 (Flex 19 only)

RECOMMENDATIONS

Hardwood flooring should only be installed in environments where "normal living" conditions are possible (between 37% and 50% RH). Please consult our warranty and installation guide for further details.



FINISHES (SATIN, MAT)

35-year warranty for residential application (see full warranty leaflet)

COMMERCIAL USE

3-year warranty for light commercial applications (see full warranty leaflet)



PREOIL

Refer to the paragraph in the warranty leaflet for more details concerning the PreOil finish

CARB
Compliant
(Phase 2)



Lacey Act
Compliant

LEED
Rating System
(Helps fulfill credits)



Preverco

CREATING AMBIANCE™

285 De Rotterdam Street, Saint-Augustin-de-Desmaures, QC G3A 2E5, Canada
Telephone: 418 878-8930 | Toll free (Canada & USA): 1 800 667-2725
Email: info@preverco.com | PREVERCO.COM