


HD PreLoc™

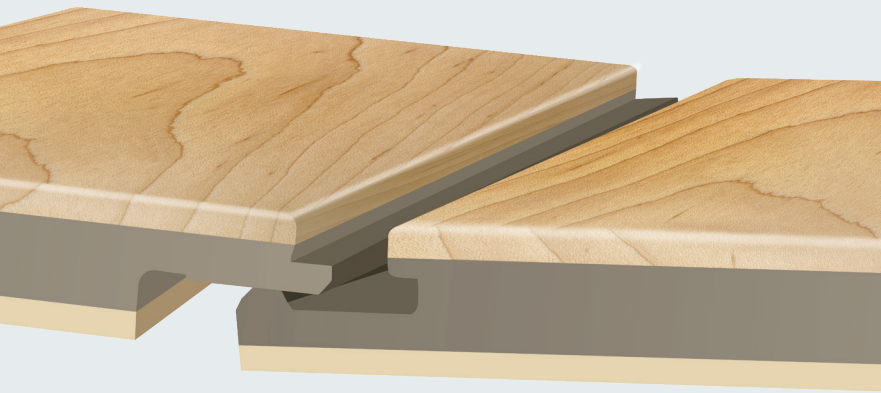

THICKNESS: $\approx 1/2"$ (12 mm)

ENGINEERED FLOOR COMPOSED OF REAL SAWN HARDWOOD TOP LAYER $\approx 1/12"$ (2 MM) WITH A HDF CORE $\approx 5/16"$ (8 MM) AND A SAWNWOOD BACKING $\approx 1/12"$ (2 MM) WITH SELF-LOCKING JOINTS FOR RAPID INSTALLATION (VÄLINGE 2G)

FEATURES & BENEFITS

- Patented, proven technology*
- Lower cost
- Fast and easy to install
- Random board lengths for a natural look
- Real hardwood surface
- 100% made in Canada
- Superior stability than a traditional hardwood floor

* Used under license from the Swedish company Välinge Innovation.

AVAILABLE SPECIES




MAPLE RED OAK YELLOW BIRCH

HARDNESS OF SPECIES (COMPARED TO RED OAK)

	%		JANKA TEST
HICKORY	141%		(1820)
HARD MAPLE	112%		(1450)
WHITE OAK	105%		(1360)
ASH	102%		(1320)
RED OAK	100%		(1290)
YELLOW BIRCH	98%		(1260)
WALNUT	78%		(1010)

INSTALLATION AREAS

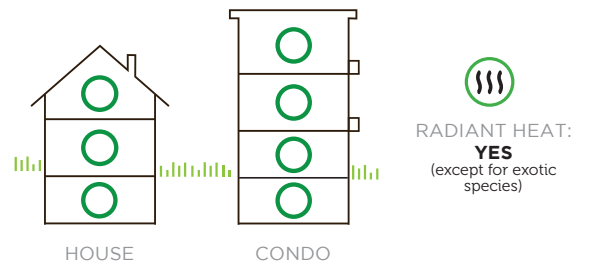

RADIANT HEAT:
YES
(except for exotic species)

INSTALLATION METHOD



FLOATING

SUGGESTED SUBFLOOR

Acoustitec VP is recommended or an equivalent accepted by the NWFA*.



** National Wood Flooring Association

HD PreLoc™

SPECIFICATIONS

THICKNESS:  1/2" (12 mm)

WIDTHS: 4 7/16" (112 mm)

LENGTH: Random lengths from 12" (35 cm) to 84" (2.13 m)

AVAILABLE ACCESSORIES

- Maintenance Kit
- Touch-up pens
- Stain
- Stair nosing
- Reducer
- Threshold
- "T" molding
- Quarter round
- Subfloors

APPLICABLE STANDARDS

SURFACE BURNING (ASTM-E-84):

- FSI (Flame-Spread index) 95 to 155 Class C (depending on species)
- SD (Smoke Development) 95 to 400 (depending on species)

SURFACE BURNING (ULC-S-102-2):

- FSV (Flame-Spread value) 65 to 155 (depending on species)
- SDC (Smoke Development Classification) 270 to 485 (depending on species)

CRITICAL RADIANT FLUX (ASTM-E-648-94A):

0.42 to 0.65 W/cm² (depending on species)

FORMALDEHYDE EMISSION (ASTM-E-1333-02):

< 0.01 ppm

FORMALDEHYDE EMISSION (BS EN 120:1992):

1.5 mg/100 g (Class E1) (depending on species)

VOC TOTAL (ASTM-D-6670-01):

< 0.011 ppm (depending on species)

ACOUSTICAL (FIELD IMPACT INSULATION CLASS):

FIIC 62

RECOMMENDATIONS

Hardwood flooring should only be installed in environments where "normal living" conditions are possible (between 37% and 50% RH). Please consult our warranty and installation guide for further details.



FINISHES
(SATIN, MAT)

35-year warranty for residential application (see full warranty leaflet)

COMMERCIAL USE

3-year warranty for light commercial applications (see full warranty leaflet)



PREOIL

Refer to the paragraph in the warranty leaflet for more details concerning the PreOil finish

CARB
Compliant
(Phase 2)



Lacey Act
Compliant

LEED
Rating System
(Helps fulfill credits)



Preverco

CREATING AMBIANCE™

285 De Rotterdam Street, Saint-Augustin-de-Desmaures, QC G3A 2E5, Canada
Telephone: 418 878-8930 | Toll free (Canada & USA): 1 800 667-2725
Email: info@preverco.com | PREVERCO.COM