


# Max19™

OUR  
TOP-OF-THE-LINE  
PLATFORM

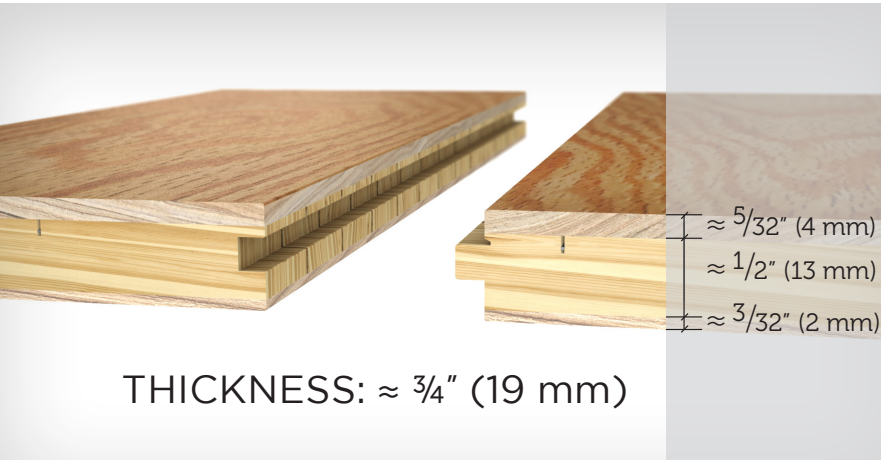


ENGINEERED FLOOR ≈  
3/4" (19 MM) THICK AND  
COMPOSED OF A ≈ 5/32" (4  
MM) HARDWOOD TOP LAYER  
ON A ≈ 1/2" (13 MM) VERTICAL  
QUARTERSAWN SOFTWOOD  
FILLETED CORE AND A ≈ 3/32"  
(2 MM) BACKER

THICKNESS: ≈ 3/4" (19 mm)


## FEATURES & BENEFITS

- High quality and stable
- Same thickness as solid
- Very versatile
- Enhances the value of high-end & more expensive species
- Available: Wider boards (5 1/8" & 7 1/8")
- Value-added textures and colours
- No imported components
- Made with 100% local resources
- Fully controlled manufacturing process
- More competitively priced than baltic birch plywood


## AVAILABLE SPECIES

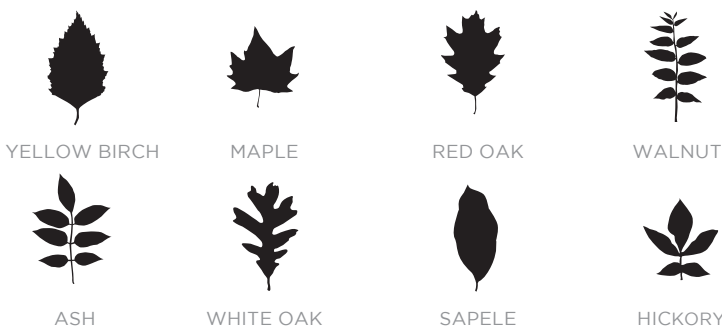

## INSTALLATION METHODS

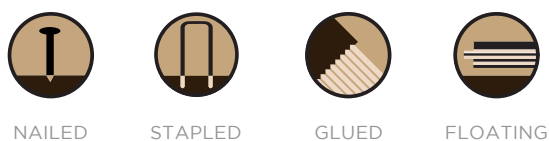

## INSTALLATION AREAS

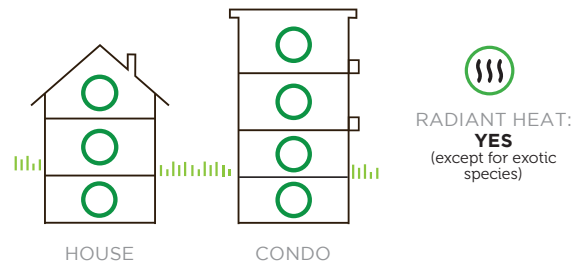

## SUGGESTED UNDERLAYMENTS

Acoustitech VP is recommended (for a floating installation), PreVap (if nailed or stapled) or an equivalent accepted by the NWFA\*.



\* National Wood Flooring Association

## SPECIFICATIONS

THICKNESS:  3/4" (19 mm)

WIDTHS: 5 1/8" (130 mm) • 7 1/8" (181 mm)

LENGTHS: Random (5 1/8") • Random XL (7 1/8")

## AVAILABLE ACCESSORIES

- Maintenance Kit
- Touch-up pens
- Stain
- Stair nosing
- Reducer
- Threshold
- "T" molding
- Quarter round
- Subfloors

## APPLICABLE STANDARDS

### SURFACE BURNING (ASTM-E-84):

- FSI (Flame-Spread index) 95 to 155 Class C (depending on species)
- SD (Smoke Development) 95 to 400 (depending on species)

### SURFACE BURNING (ULC-S-102-2):

- FSV (Flame-Spread value) 65 to 155 (depending on species)
- SDC (Smoke Development Classification) 270 to 485 (depending on species)

### CRITICAL RADIANT FLUX (ASTM-E-648-94A):

0.42 to 0.65 W/cm<sup>2</sup> (depending on species)

### FORMALDEHYDE EMISSION (ASTM-E-1333-02):

< 0.01 ppm

### FORMALDEHYDE EMISSION (BS EN 120:1992):

1.5 mg/100 g (Class E1) (depending on species)

### VOC TOTAL (ASTM-D-6670-01):

< 0.011 ppm (depending on species)

## RECOMMENDATIONS

Hardwood flooring should only be installed in environments where "normal living" conditions are possible (between 37% and 50% RH). Please consult our warranty and installation guide for further details.



### FINISHES (SATIN, MAT)

**35-year warranty** for residential application (see full warranty leaflet)

### COMMERCIAL USE

**3-year warranty** for light commercial applications (see full warranty leaflet)



**PreOil™**

### PREOIL

Refer to the paragraph in the warranty leaflet for more details concerning the PreOil finish

**CARB**  
Compliant  
(Phase 2)



**Lacey Act**  
Compliant

**LEED**  
Rating System  
(Helps fulfill credits)



**Preverco**

CREATING AMBIANCE™

285 De Rotterdam Street, Saint-Augustin-de-Desmaures, QC G3A 2E5, Canada  
Telephone: 418 878-8930 | Toll free (Canada & USA): 1 800 667-2725  
Email: info@preverco.com | PREVERCO.COM